


Application : Air Compressor 、Drill & Screwdriver

用途：空壓機、電動工具

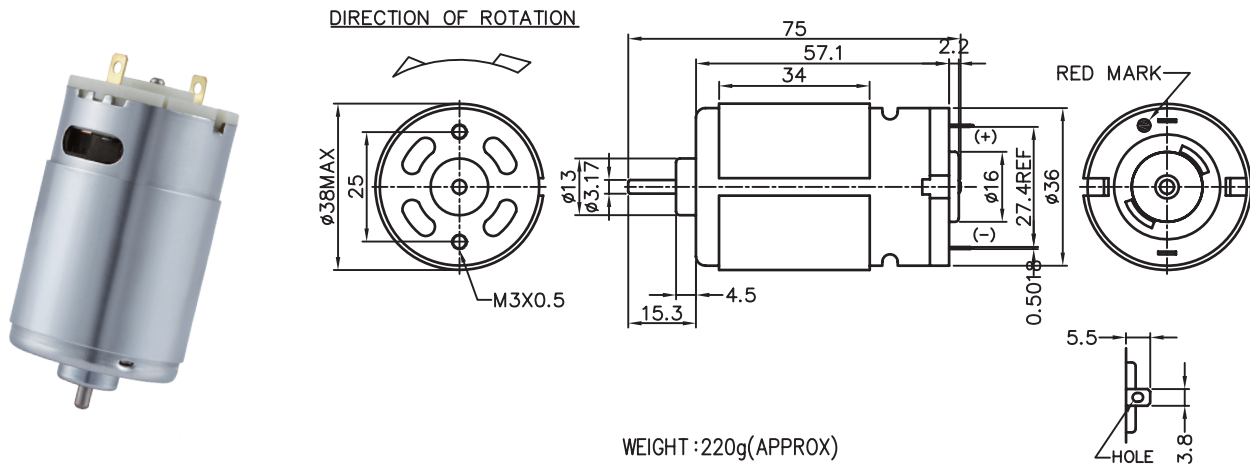

WEIGHT : 220g (APPROX)

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL		
	OPERATING RANGE	NOMINAL	SPEED rpm	CURRENT A	SPEED rpm	CURRENT A	TORQUE g-cm	TORQUE mN-m	OUTPUT W	EFF %	CURRENT A	TORQUE g-cm	TORQUE mN-m
KS3N-30100	12.0 - 24.0	12.0V CONSTANT	5200	0.30	4300	1.33	235	23.04	10.50	65	7.21	1500	147.06
KS3N-4553	6.0 - 12.0	12.0V CONSTANT	10200	0.60	8400	3.60	353	34.61	30.86	72	22.68	2513	246.37
KP3N-7521	4.8 - 12.0	7.2V CONSTANT	14500	1.50	12700	9.89	390	38.24	51.24	72	79.81	3608	353.73
KP3N-35110	6.0 - 24.0	12.0V CONSTANT	4500	0.15	3800	1.14	242	23.73	9.61	71	8.33	2020	198.04

馬達的出軸長度及性能參數，EMC 對策可依客人要求做調整，詳情可詢問相關業務人員。  
Please inquire your sales representative for output, performance and EMC solution.

