

Power sockets:



SF50780 Power socket



SF50780(B) Power socket with Blue Led



SF50880 Merit socket



SF50794 Engle socket



SF50784 Cigarette socket



SF51898-1  
RJ45 Microphone Outlet



SF50881  
Merit socket (small)

Plugs for choice:



SF51404-61 Power plug  
10A, with green LED;



SF51404-61H Power plug  
10A, with green LED;  
With 6"/15cm wire pig tail (20AWG wire)



SF51403-17 Auto cigarette plug with fuse



SF50403-14  
Auto cigarette plug with fuse



SF-BS-40 for engle socket



SF51404-44 for merit socket



SF51403-11  
Auto cigarette plug




SF50403-13 Auto cigarette plug



SF51404-45 Merit plug

USB series:

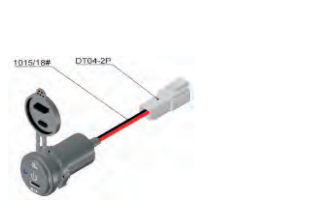

SF51913 QC3.0 36W & PD 60W USB  
SF51913WP QC3.0 36W & PD 60W USB with waterproof connector



SF51915 QC3.0 36W & PD 60W USB & volt.  
SF51915WP QC3.0 36W & PD 60W USB & volt. with waterproof connector



SF51914 Dual 2.4A & PD 60W USB  
SF51914WP Dual 2.4A & PD60W USB with waterproof connector



SF51910 Dual PD60W USB  
SF51910WP Dual PD60W USB with waterproof connector



Dual type C USB

| SF CODE | DETAILS           |
|---------|-------------------|
| SF51921 | PD/60W+PD/60W     |
| SF51922 | PD/60W+QC3.0/36W  |
| SF51923 | PD/60W+5V/2.4A    |
| SF51924 | QC3.0/36W+5V/2.4A |
| SF51925 | 5V/2.4A+5V/2.4A   |
| SF51926 | 5V/3.1A           |

type C+C



Type A+Type C USB

| SF CODE | DETAILS                 |
|---------|-------------------------|
| SF51881 | QC3.0/36W + PD/60W      |
| SF52881 | 5V/2.4A+ Type-c 5V/2.4A |

A+C

SF51880 2.4A+QC3.0/36W Dual USB



SF51927 Type-A/36W +Type-C/100W  
Type-a : (3.6V-12V MAX:36W)  
Type-c : (5V-20V MAX:100W)  
Type-a & c simultaneously ( 36W+60W)

A+C (36+100W)  
Super quick charge



SF51884 QC 3.0 USB&Voltmeter  
12/24V DC  
Voltmeter range: 6~30V DC  
USB output: QC3.0 (3.6V~12V,max:18W)  
With touch switch

Touch switch



SF50795S  
Output: 5V/2.4A max



SF50782  
Output: 5V/3.1A totally



SF50884  
Output: 5V/3.1A totally



SF50896  
Output:5V/2.4A MAX  
With switch



SF50799  
Output: 5V/4.8A  
(2.4A max each port)



SF50788  
Output: 5V/4.8A  
(2.4A max each port)



SF50874  
Output: 5V/4.8A  
(2.4A max each port)



SF50797-R  
Output: 5V/4.2A totally  
with Voltmeter



SF50795  
Output:5V 2.4A



SF50796  
Output: 5V 4.8A



SF51887  
Output: 5V 4.8A  
with special cover



SF50789 (S)  
Output: 5V/4.8A  
(2.4A max each port)

Fixed cover 90°  
open/close



SF50789



SF50789-S

### LED Meters:



SF51886 Temp.Meter  
Measuring range: -40~120°C  
with Temp. sensor



SF50793 Ammeter  
Measuring range: 0~10A



SF50786 Voltmeter:  
Measuring range: 5~30V

SF50786S  
With low voltage alarm (<11V)



SF50889 Dual Voltmeter:  
10~60V



SF50792 Dual Volt.&Amp.:  
5~30V, 0~10A



SF50798-12V/24V  
segmental display Volt. :  
(12V: 5~15V; 24V: 5~30V)



SF51790 Battery Capacity VoltMeter  
Input: 5~48V  
with touch switch  
Measuring range: %  
Blue/red/green led for choice



SF51791 Voltmeter  
Input: 5~48V



SF51792 Voltmeter  
Input: 5~48V

Blue/red/green/white/orange led for choice

### OLED Screen



SF50870 OLED Ammeter,  
with 75mv spltter (0~100A)



SF50871 OLED Temp. meter  
Mesuring range:-40~120°C  
With sensor



SF50872 OLED Voltmeter:  
Measuring range:8~60V



SF51885 OLED Volt.&Amp Meter  
Measuring range: 8~60V,0~100A DC



SF51882 OLED dual Volt. Meter  
Measuring range:8~60V DC



Dual USB with touch switch

| SF NO.    | output     |
|-----------|------------|
| SF51902-1 | QC:18W x 2 |
| SF51902-2 | 5V 3.1A    |
| SF51902-3 | 5V 4.2A    |
| SF51902-4 | 5V 4.8A    |



Dual USB with touch switch  
With voltmeter

| SF NO.    | output     |
|-----------|------------|
| SF51903-1 | 5V 4.8A    |
| SF51903-2 | QC:18W x 2 |



Dual USB & Volt.meter, with on-off switch

| SF CODE  | USB Detail     |
|----------|----------------|
| SF51905A | QC3.0 dual USB |
| SF51905B | 4.8A dual USB  |
| SF51905C | QC3.0+PD       |



Dual port USB **NEW**

| SF NO.    | USB                  |
|-----------|----------------------|
| SF51956-1 | PD+QC3.0             |
| SF51956-2 | dual PD, with switch |
| SF51956-3 | dual PD              |



Triple port USB  
With switch **NEW**

| SF NO.    | Output                        |
|-----------|-------------------------------|
| SF51952-1 | QC3.0+PD45Wx2                 |
| SF51952-2 | QC3.0+PD45Wx2, With voltmeter |



SF51954 Triple port USB  
QC3.0+dual PD, with switch **NEW**



SF51901 USB QC3.0 & Voltmeter  
with TYPE-C+PD  
5V-3A 9V-3A 12V2.5A 15V-2A 20V-1.5A



SF51906 QC3.0+PD dual USB  
with on-off switch



SF51907 QC3.0+PD dual USB & Volt.meter  
with on-off switch



SF50628/ 50629/ 50630

Aviation aluminum USB



SF56012



SF56013

Material:7075 Aviation aluminum  
Input:12/24VDC

| SF NO.  | Output details                    | Housing color |
|---------|-----------------------------------|---------------|
| SF56028 | 5V/3.1A                           | B/BL/G/R      |
| SF56029 | 5V/4.2A                           | B/BL/G/R      |
| SF56030 | 5V/4.8A                           | B/BL/G/R      |
| SF56012 | QC 3.0:<br>6V-3A/ 9V-2A/ 12V-1.5A | B/BL/G/R      |
| SF56013 | QC 3.0&Voltmeter                  | B/BL/G/R      |



SF50892  
Output: 5V/2.4A +AUX



7075 aluminum Dual USB  
With voltmeter , with touch switch **NEW**



7075 Aluminum USB  
With voltage& power display **NEW**

### SUNFINE sockets for multi-combination:

#### USB series:

**QC 3.0** SF51880 DUAL USB QC3.0 & 2.4A

**Type-C + USB** SF51881 DUAL USB QC3.0 & QC4.0

**QC 4.0** SF52881 2.4A+TYPE C 2.4A

**12U**

**1U** SF50782 Output: 5V/3.1A totally

**2U** SF50874 Output: 5V/4.8A (2.4A max each port)

**3U** SF50799 Output: 5V/4.8A (2.4A max each port)

**4U** SF50797-R Output: 5V/4.2A totally with Voltmeter

**5U** SF50788 Output: 5V/4.8A (2.4A max each port)

**6U** Dual port USB SF50778-1 3.1A totally

**7U** SF50884 Output: 5V/3.1A totally

**8U** SF50796 Output: 5V 4.8A

**9U** SF50795S Output: 5V/2.4A max

**11U** SF50896 Output: 5V/2.4A max +switch

**13U** SF51913 QC3.0 & Type-C

**14U** SF51915 QC3.0 & Type-C&Volt.

**15U** SF51914 Dual 2.4A & Type-C

**DPD** SF51921 PD/60W+PD/60W **NEW**

#### Power sockets:

**1P** SF50780 Power socket

**2P** SF50780(B) Power socket with Blue Led

**M** SF50880 Merit socket

**E** SF50794 Engle socket

**C** SF50784 Cigarette

**Micro** Sf51898-1 Rj45 microphone outlet

#### DC meters:

**V** SF50786 Voltmeter: 5~30V

**DV** SF50889 Dual Voltmeter: 10~60V

**D** SF50792 Dual Volt.&Amp.: 5~30V, 0~10A

**A** SF50793 Ammeter 0~10A

**2V** SF50798-12V/24V

**Vt1**

**Vt2**

**Vt3**

#### Standard Acc for single sockets:

SF-BS17-1 SF-BS17-2 SF-BS17-3 SF-BS17-4 SF-BS17-5 SF-BS17-6 SF-BS17-7 SF-BS17-8

SF-BS17-9 SF-BS17-10 SF-BS17-12 SF-BS17-13 SF-BS17-14 SF-BS21 Standard Nut SF-BS22 Quick nut

SF-BS-11-1 One hole front panel SF-BS-10-1 One hole rear panel SF-BS1S End housing SF-BS2S Middle housing SF-BS-14-1 One hole tent SF-BS16 One-hole Bracket

SF-BS-14-2 SF-BS-14-3 SF-BS14-2-1P3U SF-BS14-3-1UC1P

Rear Panel SF-BS10-2 SF-BS10-3 SF-BS10-2-1P1P SF-BS10-3-1P1UV

Front Panel SF-BS11-2 SF-BS11-3 SF-BS11-2-1P1P SF-BS11-3-1P1UV



SF51661 SF51661-1U SF51661-1P



SF51662

50A Anderson plug panel with socket

SF51662-1P1U

|              |        |                                |
|--------------|--------|--------------------------------|
| SF51661      | 50A *1 | /                              |
| SF51661-1U   | 50A *1 | 3.1A USB                       |
| SF51661-1P   | 50A *1 | power socket                   |
| SF51662      | 50A *1 | /                              |
| SF51662-1U1P | 50A *1 | 3.1A USB+ power socket         |
| SF51662-3U2P | 50A *1 | 4.8A USB+Blue-led power socket |

Can combine with other Sunfine sockets



NEW

50A Anderson plug panel

| SF NO.    | Anderson plug |
|-----------|---------------|
| SF51660-1 | 50A *1        |
| SF51660-2 | 50A *2        |



Surface mount anderson plug

| SF CODE        | DETAILS  |
|----------------|--|
| SF51664-1A     | Tent with anderson plug 50A                        |
| SF51664-1A1P   | Tent with anderson plug 50A+ power outlet          |
| SF51664-1A1U   | Tent with anderson plug 50A+ 3.1A USB              |
| SF51664-1A1P1U | Tent with anderson plug 50A+ power outlet+3.1A usb |
| SF51664-2A     | Tent with 2*anderson plug 50A                      |



SF50890-1U1P 3.1A USB+Power Socket



SF50988-2P2P3U2V  
Surface mount sockets with circuit breaker switch  
1\*circuit breaker switch  
1\*4.8A dual USB  
2\*power socket with blue LED  
1\*12V voltmeter

SF54042 Switch socket


3PIN  
Red , blue, green,white led for choice



DIGITAL VOLTMETER

SF51208 SAE to USB Cable Adapter with Blue Voltmeter 4.8A

Input vdtage: 12V-24V  
Output: 5V/4.8A  
Dual USB Socket for Motorcycle for Smart Phone Tablet GPS  
10A fused

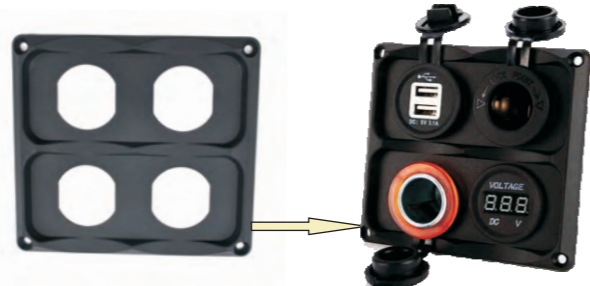

SF-BS15 Four-hole Panel

SF-BS15-7U1PCV



Two Sockets combination with switch SF-BS27-(1P1U/2P3U/2P2V.....)



Volt. &Temp Meter  
InPut: 12V-24V  
Measuring range: -40~80 °C  
SF NO. Lighting color  
SF51955-R Red led  
SF51955-B Blue led

Volt. &Temp Meter  
InPut: 12V-24V  
Measuring range: -40~80 °C  
SF NO. Lighting color  
SF51961 segmental display



Hour meter  
12V-24V  
SF NO. Lighting  
SF51981-R Red led  
SF51981-B Blue led  
SF51981-G Green led



European style Cigarette lighter  
12V 0-150W  
SF NO. Lighting  
SF51982-R Red led  
SF51982-B Blue led  
SF51982-G Green led  
SF51982-O Orange led



SF50885 TOYATA USB  
Input: DC12V/24V  
Output: DC5V 3.1A totally



SF50891 2.4A USB+AUX  
Input: DC 12/24V  
Out ut: 5V 2.4A



SF50970 switch size USB a+c  
2.4A+2.4A type C port

SF51962 Swith size USB  
QC3.0+PD port  
Blue,red,green lighting for option



SF51916  
QC3.0+PD TYPE-C USB with volt.

SF50887-R USB 4.2A & Voltmeter  
Switch size

SF50991 Switch size type Volt.&amp;.meter  
Measuring range: 8~60V,0~100A DC

SF50888 Dual Volt.meter  
Measuring range:8~60V DC



Switch size 2 Port USB  
Input: DC12V/24V  
SF No LED Color Output:  
SF50886 BLUE DC 5V  
SF50886-R RED /3.1A  
SF50886-G GREEN  
SF50886-O ORANGE  
SF50886-2B BLUE DC 5V  
SF50886-2R RED 4.8A  
SF50886-2G GREEN  
SF50886-2O ORAN



SF51951 2.4A USB with waterproof cap

SF51980 15W DC/DC CONVERTER  
12V TO 5V /3A MAX



SF51945  
Switch size RJ45 socket.

Snap-in type USB  
Input: 12-30V  
Output: 5V 2.1A (total) or 4.2A for choice  
Led indicator light: Blue or without  
Wire 150mm, AWG 18#



| SF code   | Current     | Led      | amp  |
|-----------|-------------|----------|------|
| SF51104-1 | single port | Blue led | 2.1A |
| SF51104-2 | dual port   | Blue led | 2.1A |
| SF51104-3 | single port | /        | 2.1A |
| SF51104-4 | dual port   | /        | 2.1A |
| SF51104-5 | dual port   | Blue led | 4.2A |
| SF51104-6 | dual port   | /        | 4.2A |



Socket connection Harness  
SF NO. Length  
SF51957-1 0.6m simple cable  
SF51957-2 0.6M with 10A fuse holder  
SF51957-3 1.5M with 10A fuse holder

**FOR Motorcycle**



SF-BS25  
One Hole Hand Stent



SF-BS24  
Cylinder Quick Nut



SF50782-10 3.1A



SF50884-10 3.1A



SF50780-10 POWER



**FOR BUS**



Mounting panel for USB (for bus rail 32mm/35mm)  
SF-BS26-32MM/35MM

USB not included, you may choose from our USB series



Type-c Male to Female AUX Flush Panel Mount Extension Cable  
for Car Truck Boat Motorcycle Dashboard ;

type-c Extension Cable,0.3m/1m;

| SF CODE   | Cable length |
|-----------|--------------|
| SF51209-1 | 0.3M         |
| SF51209-2 | 1M           |

When charging both port at the same time, the output is 2.1A+2.1A



A:surface mounting

B:recessed mounting



A:surface mounting

B:recessed mounting

| SF CODE    | Charging         | Port type |
|------------|------------------|-----------|
| SF52216-1A | PD/36W+QC3.0/36W | TYPE A+C  |
| SF52216-2A | dual PD/36W      | TYPE C+C  |
| SF52216-1B | PD/36W+QC3.0/36W | TYPE A+C  |
| SF52216-2B | dual PD/36W      | TYPE C+C  |

| SF CODE    | Charging         | Port type |
|------------|------------------|-----------|
| SF52215-1A | PD/36W+QC3.0/36W | TYPE A+C  |
| SF52215-2A | dual PD/36W      | TYPE C+C  |
| SF52215-1B | PD/36W+QC3.0/36W | TYPE A+C  |
| SF52215-2B | dual PD/36W      | TYPE C+C  |



Flat USB panel size: 89\*50.1\*18.1mm

| SF CODE   | DETAILS                   |
|-----------|---------------------------|
| SF52250-1 | 2 USB-A (total 3.1A)      |
| SF52250-2 | 2 USB-A (total 4.8A)      |
| SF52250-3 | 2 USB-A (dual QC3.0 )     |
| SF52250-4 | USB-A+USB-C (total 4.8A)  |
| SF52250-5 | USB-A+USB-C (QC3.0+PD3.0) |



Flat USB panel size: 66.5\*39\*15.5mm

| SF CODE   | DETAILS                   |
|-----------|---------------------------|
| SF52201-1 | 2 USB-A (total 3.1A)      |
| SF52201-2 | 2 USB-A (total 4.8A)      |
| SF52201-3 | USB-A+USB-C (QC3.0+PD3.0) |



Flat USB panel size: 63.7\*47.8\*18.1mm

| SF CODE   | DETAILS                   |
|-----------|---------------------------|
| SF52253-1 | 1 USB-A (2.4A)            |
| SF52253-2 | 1 USB-A (QC3.0)           |
| SF52253-3 | 2 USB-A (total 3.1A)      |
| SF52253-4 | 2 USB-A (total 4.8A)      |
| SF52253-5 | 2 USB-A (dual QC3.0 )     |
| SF52253-6 | USB-A+USB-C (QC3.0+PD3.0) |



Flat USB panel size: 63.7\*47.8\*18.1mm

| SF CODE   | DETAILS                   |
|-----------|---------------------------|
| SF52255-1 | 1 USB-A (2.4A)            |
| SF52255-2 | 1 USB-A (QC3.0)           |
| SF52255-3 | 2 USB-A (total 3.1A)      |
| SF52255-4 | 2 USB-A (total 4.8A)      |
| SF52255-5 | 2 USB-A (dual QC3.0 )     |
| SF52255-6 | USB-A+USB-C (QC3.0+PD3.0) |



Flat USB panel size: 89\*50.1\*18.1mm

| SF CODE   | DETAILS                   |
|-----------|---------------------------|
| SF52251-1 | 2 USB-A (total 3.1A)      |
| SF52251-2 | 2 USB-A (total 4.8A)      |
| SF52251-3 | 2 USB-A (dual QC3.0 )     |
| SF52251-4 | USB-A+USB-C (total 4.8A)  |
| SF52251-5 | USB-A+USB-C (QC3.0+PD3.0) |



Flat USB panel size: 89\*41\*21mm

| SF CODE   | DETAILS                      |
|-----------|------------------------------|
| SF52252-1 | 1 USB-A (2.4A)               |
| SF52252-2 | 2 USB-A (total 3.1A)         |
| SF52252-3 | 2 USB-A (total 4.8A)         |
| SF52252-4 | USB-A+USB-C (total 4.8A)     |
| SF52252-5 | USB-A+USB-C (QC3.0+PD3.0)    |
| SF52252-6 | 2 USB-C (total 4.8A)         |
| SF52252-7 | 2 USB-C (PD3.0 quick charge) |
| SF52252-8 | 2 USB-A+1 USB-C              |



Flat USB panel size: 63.7\*47.8\*18.1mm

| SF CODE   | DETAILS                   |
|-----------|---------------------------|
| SF52254-1 | 1 USB-A (2.4A)            |
| SF52254-2 | 1 USB-A (QC3.0)           |
| SF52254-3 | 2 USB-A (total 3.1A)      |
| SF52254-4 | 2 USB-A (total 4.8A)      |
| SF52254-5 | 2 USB-A (dual QC3.0 )     |
| SF52254-6 | USB-A+USB-C (QC3.0+PD3.0) |



Flat USB panel

| SF CODE   | DETAILS                   |
|-----------|---------------------------|
| SF52256-1 | 2 USB-A (total 4.8A)      |
| SF52256-2 | USB-A+USB-C (QC3.0+PD3.0) |



Aluminum car charger  
Size: 64.5\*34mm  
with voltmeter

| SF CODE   | Details             |
|-----------|---------------------|
| SF50962-1 | DC 5V-4.8A          |
| SF50962-2 | DC 5V-dual QC3.0    |
| SF50962-3 | DC 5V- QC3.0+PD 18W |
| SF50962-4 | DC 5V- 2.4A+PD 18W  |



Aluminum car charger  
Size: 60\*27mm

| SF CODE   | Details             |
|-----------|---------------------|
| SF50963-1 | DC 5V-dual QC3.0    |
| SF50963-2 | DC 5V- QC3.0+PD 18W |



Super quick charge USB charger  
With Voltmeter, Aluminum housing

| SF CODE   | Port details      |
|-----------|-------------------|
| SF50972-1 | USB port 66W +40W |
| SF50972-2 | Type-C 66W + 40W  |



SF50961 Aluminum Car charger  
Qc 3.0+ PD type C  
Input:9V-30V  
total Output:36W,  
Size:66\*30\*30mm



SF50982 Triple USB port  
PD 36W+65W+100W USB  
Type C QC3.0  
Usb1: 5V-12V/5A(65W)  
Usb2: 5V-20V/5A(100W)



SF50983 Triple USB port  
PD 36W+65W+65W USB  
Type C QC3.0  
Usb1: 5V-12V/5A(65W)  
Usb2: 5V-12V/5A(65W)



SF50978 PD65W Single portusb charger  
Aluminum housing



SF50902 2port USB Charger  
with LED digital display  
Input voltage: DC 12-24V  
Output: DC5V /4.8A total



SF50919 2port USB Charger  
with LED volt.&amp; Display  
Input voltage: DC 12-24V  
Output: DC5V /4.8A total



SF50969 Car charger  
QC 3.0+Voltmeter



SF50954 USB charger  
with 3 power sockets & voltmeter  
with 2.1A & 1A USB port



Dual USB charger & voltmeter, merit type  
7075 aluminum alloy housing

| SF CODE | output | Housing Color choice  |
|---------|--------|-----------------------|
| SF51132 | 4.2A   | Golden/blue/black/red |



Dual USB charger, merit type  
7075 aluminum alloy housing

| SF CODE | output         | Housing Color choice  |
|---------|----------------|-----------------------|
| SF51133 | QC3.0 & TYPE C | Golden/blue/black/red |



Dual USB charger & voltmeter, merit type  
7075 aluminum alloy housing

| SF CODE | output | Housing Color choice  |
|---------|--------|-----------------------|
| SF51130 | 4.2A   | Golden/blue/black/red |
| SF51131 | QC3.0  | Golden/blue/black/red |



SF50403-22  
Auto cigarette socket



SF50403-22SP  
Power Plug 10AMP & Socket 12 Volt



| SF CODE      | Cable length |
|--------------|--------------|
| SF50974-1M   | C-C 1M       |
| SF50974-2M   | C-C 2M       |
| SF50974-60W  | C-C 60W 1M   |
| SF50974-100W | C-C100W 1M   |
| SF50974-1MA  | C-APPLE 1M   |
| SF50974-2MA  | C-APPLE 2M   |



SF51928 Dual power outlet with led



SF51929 Dual power outlet with dual usb  
With volt. display  
Adjustable direction



SF51933 Single power outlet with single usb



SF50984  
Dual power outlet with 3.1A dual USB port  
With switch to control each USB port  
Voltage indication



SF51933 Single power outlet  
with dual usb & Type C



SF51934 Dual power outlet with dual usb



Dual power outlet with switch

| SF NO.    | Details                            |
|-----------|------------------------------------|
| SF51985-1 | dual USB +QC3.0+Volt. & Temp meter |
| SF51985-2 | dual USB +QC3.0+Volt. meter        |



SF51986 Car inverter  
12V input inverter to AC220 output  
dual QC3.0 usb +voltmeter  
With over-load lighting indication (Blue normal, red over-load)



Wireless Qi/USB C Phone Mount Charger with Switch, Fast Charge  
Waterproof Motorcycle Handlebar Cellphone Holder  
Tool-Free Install for iPhone Samsung 3.5-6.8 inch Smartphones(Upgraded)

| SF CODE   | Suit for phone size    | Clamp size |
|-----------|------------------------|------------|
| SF51334-1 | 152*76*10.5mm 4.7-6.1" | 22/25/32mm |
| SF51334-2 | 168*83*10.5mm 5.5-6.8" | 22/25/32mm |

