




CONTROLLERS /

MAIN FEATURES

Multi-function DC brushless motor controller with UART communication function, ultra-quiet function, power-off brake, anti-flying function, self-check function, three-stage speed regulation, anti-theft function. The controller shell is made of alloy aluminum, which has high impact strength. The surface is finely ground and sprayed with fine sand, and the appearance is exquisite and detailed. The controller has reliable process and stable performance. The inside of the product is glued and waterproofed, which effectively guarantees the waterproof performance of the product IPX5.

UART 通讯功能、超静音功能、断电刹车、防飞车功能、自检功能、三档分级调速、防盗功能等多功能为一体的直流无刷电机控制器。控制器外壳采用合金铝材质，抗冲击强度高。表面精研磨喷细砂工艺，外观精美细致。该控制器工艺可靠、性能稳定。产品内部采用灌胶防水方式，有效保证产品 IPX5 的防水性能。


info@ytk-group.co.jp

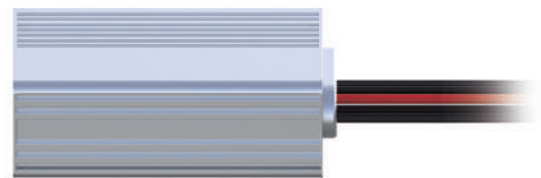

MCU-6-CXX /



认证 /Certifications	RoHS
尺寸 /Size	L 85mm W 53mm H 30mm
防水 /Waterproof	IPX5
额定功率 /Rated Power(W)	250/350
额定电流 /Rated Current (A)	7
额定电压 /Rated Voltage(DCV)	36/48
电流限制 /Current Limit (A)	15/18
工作温度 /Operating Temperature	-20-45°C
协议 / Protocol	CAN/UART
控制类型 / Control Type	Sine Wave

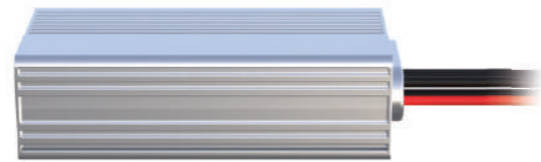

MCU-9-CXX /



认证 /Certifications	RoHS
尺寸 /Size	L 112mm W 53mm H 30mm
防水 /Waterproof	IPX5
额定功率 /Rated Power(W)	500/750
额定电流 /Rated Current (A)	12
额定电压 /Rated Voltage(DCV)	36/48
电流限制 /Current Limit (A)	20/22
工作温度 /Operating Temperature	-20-45°C
协议 / Protocol	CAN/UART
控制类型 / Control Type	Sine Wave



MCU-12-CXX /



认证 /Certifications	RoHS
尺寸 /Size	L 122mm W 55mm H 40mm
防水 /Waterproof	IPX5
额定功率 /Rated Power(W)	750/1000
额定电流 /Rated Current (A)	15/20
额定电压 /Rated Voltage(DCV)	48/52
电流限制 /Current Limit (A)	25/30
工作温度 /Operating Temperature	-20-45°C
协议 / Protocol	CAN/UART
控制类型 / Control Type	Sine Wave



MCU-9*2-AXX /



认证 /Certifications	RoHS
尺寸 /Size	L 130mm W 65mm H 56mm
防水 /Waterproof	IPX5
额定功率 /Rated Power(W)	500/750
额定电流 /Rated Current (A)	12/15
额定电压 /Rated Voltage(DCV)	48/52
电流限制 /Current Limit (A)	20/25
工作温度 /Operating Temperature	-20-45°C
协议 / Protocol	CAN/UART
控制类型 / Control Type	Sine Wave