

BLDC3649



Brushless Dc Motor

Application : Gear Motor 、 Pump

用途：齒輪箱、泵浦



DIRECTION OF ROTATION

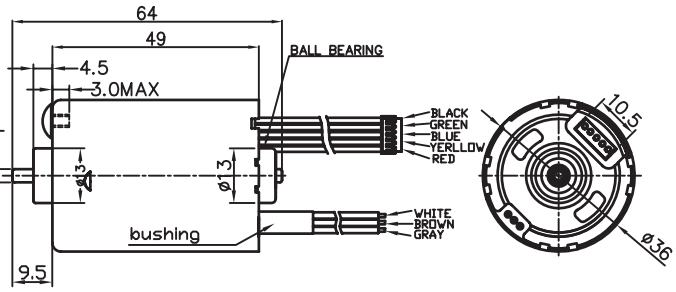

WEIGHT : 210g(APPROX)

MOTOR LEAD WIRE			HALL SIGNAL WIRE					
WIRE	U	V	W	+5V	HA	HB	HC	GND
COLOUR	GRAY	BROWN	WHITE	RED	YELLOW	BLUE	GREEN	BLACK

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL			
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFF	CURRENT	TORQUE		
			rpm	A	rpm	A	g-cm	mN-m	W	%	A	g-cm	mN-m
BLDC3649B1W0	-----	24.0V CONSTANT	5000	0.16	4484	0.72	286	28.04	13.17	81	5.23	2379	233.24
BLDC3649B1W2	-----	12.0V CONSTANT	3500	0.16	3135	0.85	242	23.73	7.79	78	6.04	1936	189.80

馬達的出軸長度及性能參數，EMC 對策可依客人要求做調整，詳情可詢問相關業務人員。
Please inquire your sales representative for output, performance and EMC solution.

